

**Features**

**Housing**

Die-formed Cold-rolled Steel and Epoxy Powder Coating  
 Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

**Optical**

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity  
 LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

**Electrical**

High Power Factor, Low THD

**Lamp**


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)  
 Available on Multiple Color Temperature Model (MCT)

**Certifications**

ETL/cETL Listed, Energy Star

**Warranty**

5 Years Warranty on Driver and LED Module

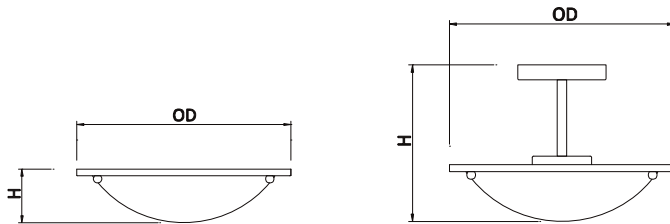

**LED Type**

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-xxxxK	120V	18W	> 80	1340 / 3000K	12.5" x 3.8"	Yes
DC014D-2G-B-xxxxK	120V ~ 277V	23W	> 80	2150 / 3000K	15.0" x 3.8"	Yes
DC016D-2G-B-xxxxK	120V ~ 277V	28W	> 80	2600 / 3000K	16.6" x 4.1"	Yes
DC018D-2G-B-xxxxK	120V ~ 277V	35W	> 80	3250 / 3000K	18.4" x 4.1"	Yes

**Pendant LED Type**

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC012D-2G-B-PD-xxxxK	120V	18W	> 80	1340 / 3000K	12.5" x 10.8"	Yes
DC014D-2G-B-PD-xxxxK	120V ~ 277V	23W	> 80	2150 / 3000K	15.0" x 10.8"	Yes
DC016D-2G-B-PD-xxxxK	120V ~ 277V	28W	> 80	2600 / 3000K	16.6" x 11.1"	Yes
DC018D-2G-B-PD-xxxxK	120V ~ 277V	35W	> 80	3250 / 3000K	18.4" x 11.1"	Yes